



DATASAT
TECHNOLOGIES

Role of WiFi / IEEE 802.11n & Related Protocols in Smart Grid

IEEE ComSoc | NATEA-SV Workshop
September 25, 2010

Venkat Kalkunte
CTO, Datasat Technologies


The Smart Grid...

- Enable active consumer participation in electricity consumption, controlling user and producer costs and shaping/reducing energy demand
- Make the grid better able to integrate new power sources (wind, solar) that are numerous intermittent and difficult to forecast
- Prepare for large load fluctuations due to rooftop solar and charging electric cars at home
- Increase grid reliability & efficiency (with full security)

A robust, secure communications infrastructure is essential to the smart grid




Smart Grid Networks

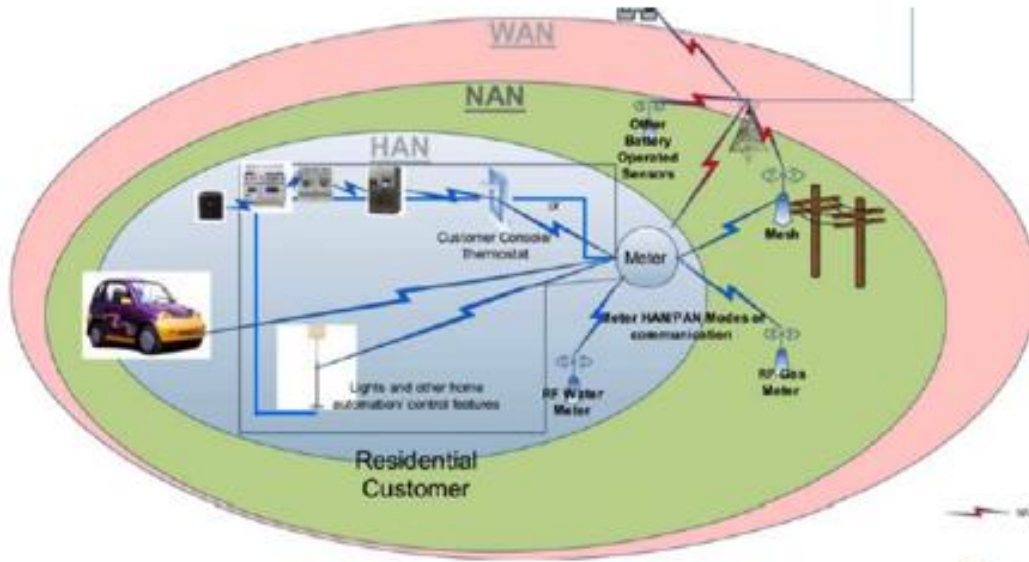

Three Smart Grid Segments



The Home Area Network

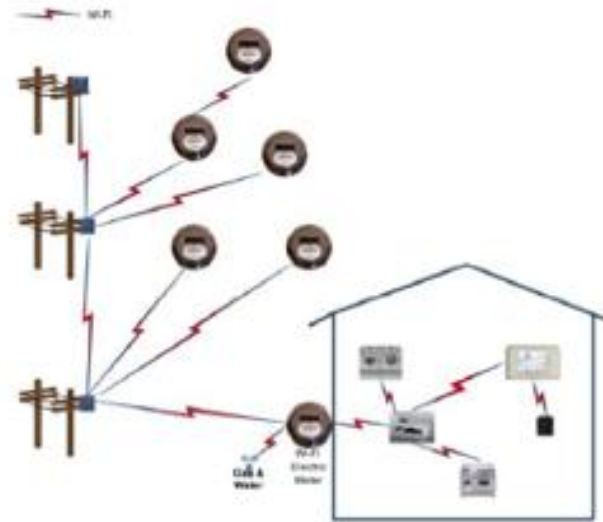

The Smart Grid Neighborhood Area Network



Home Area Network

- Communication between appliances and sensors in the home, with consumer remote access and possibly Utility access and control of major electrical loads

Advanced Metering Infrastructure

- Meters that report regularly to the Utility and can be a gateway to the HAN for pricing information and control

Electricity Grid Sensing and Control

- A network for real-time monitoring and control of transmission and local distribution networks

The smart grid will use several complementary PHY/MAC standards



Home Area Network Requirements

- Distances < 100 ft
- Variable RF propagation conditions: e.g. concrete walls and RF-reflecting surfaces
- Potential standards: Zigbee, Wi-Fi, Homeplug
- Cost & power characteristics suitable for incorporating into appliances & battery-powered devices
- Bandwidth requirements for smart grid applications are low (kbps), but if integrated with data networking, Internet, video and TV become high (50+ Mbps throughput)



Roles Of ZigBee And 802.11n In HAN

ZigBee

- Designed for low bit-rate, low power draw, simple, low cost silicon
- Short-range and limited in rates
- For building automation, networked light switches, thermostats etc, ZigBee still has an advantage in power efficiency
- Control infrastructure for STBs and remotes, interconnect other ZB devices via RF4CE

802.11n

- Much higher complexity, but higher rates, volume silicon cost is lower now
- Long-range measured over 3-7 wall penetration
- For home multi-media delivery and HD video distribution
- Mobile SIP/Telephony an alternative to DECT or legacy cordless telephone systems

Smart Energy 2.0, the next-generation energy management protocol for Smart Grid-enabled homes would require ZigBee and 802.11n to inter-operate




Wi-Fi in the Home Area Network


- Wi-Fi with 802.11n is close to satisfying all requirements:
 - Range to 100ft+ reliably indoors, with MIMO
 - Inexpensive silicon through mass production
 - Low power consumption
 - High bandwidth thanks to 20/40MHz channels and MIMO (to 450Mbps with 3x spatial streams)



Wireless 4X4 Equivalent to Wired Networks in Performance

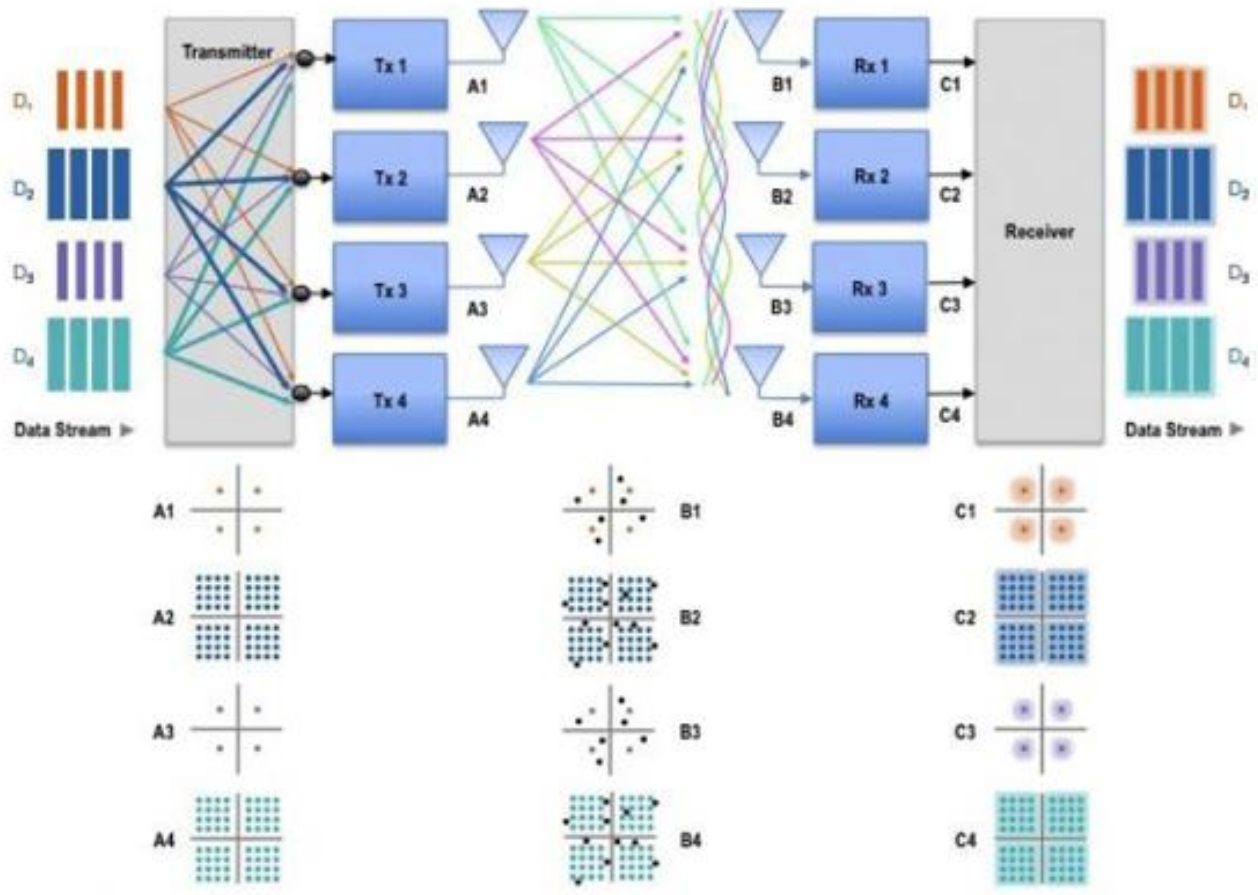


Higher Throughput and Wall Penetration in 4x4 Systems

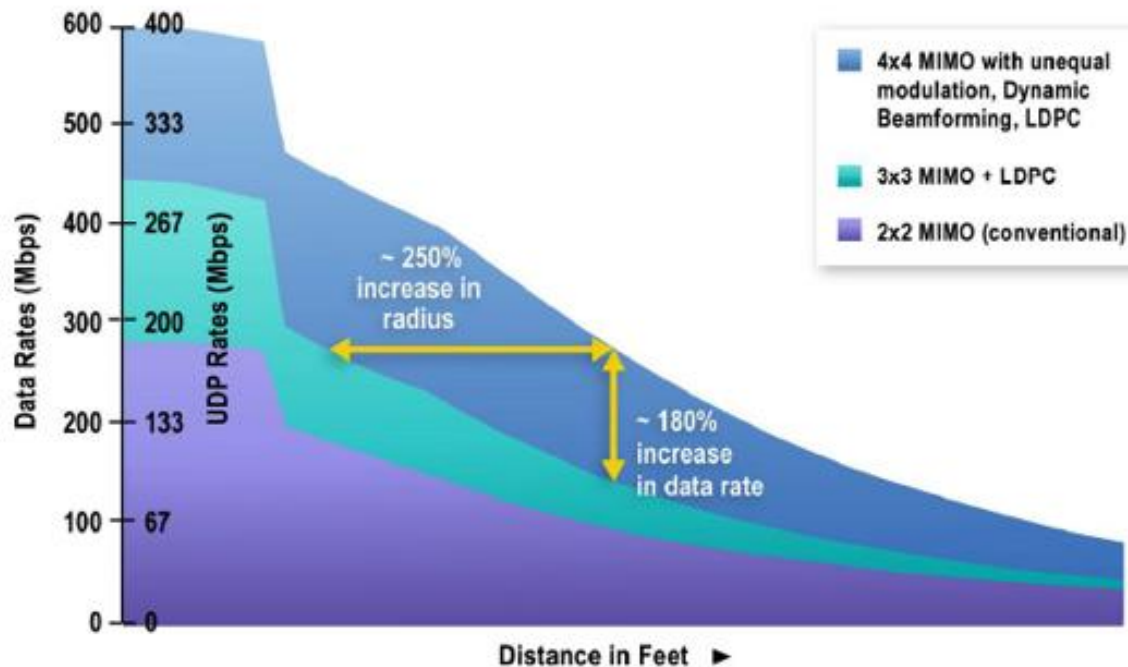

* Typical simulation graph used to show over-the-air bitrate. PER is set to about 1%, and packet retransmission is needed to achieve desired reliability at the expense of delay. In this model, at a distance of 50 feet, the 4x4 system's throughput outperforms that of a 3x3 system by about 180%.



Lower PER of 4X4 MIMO

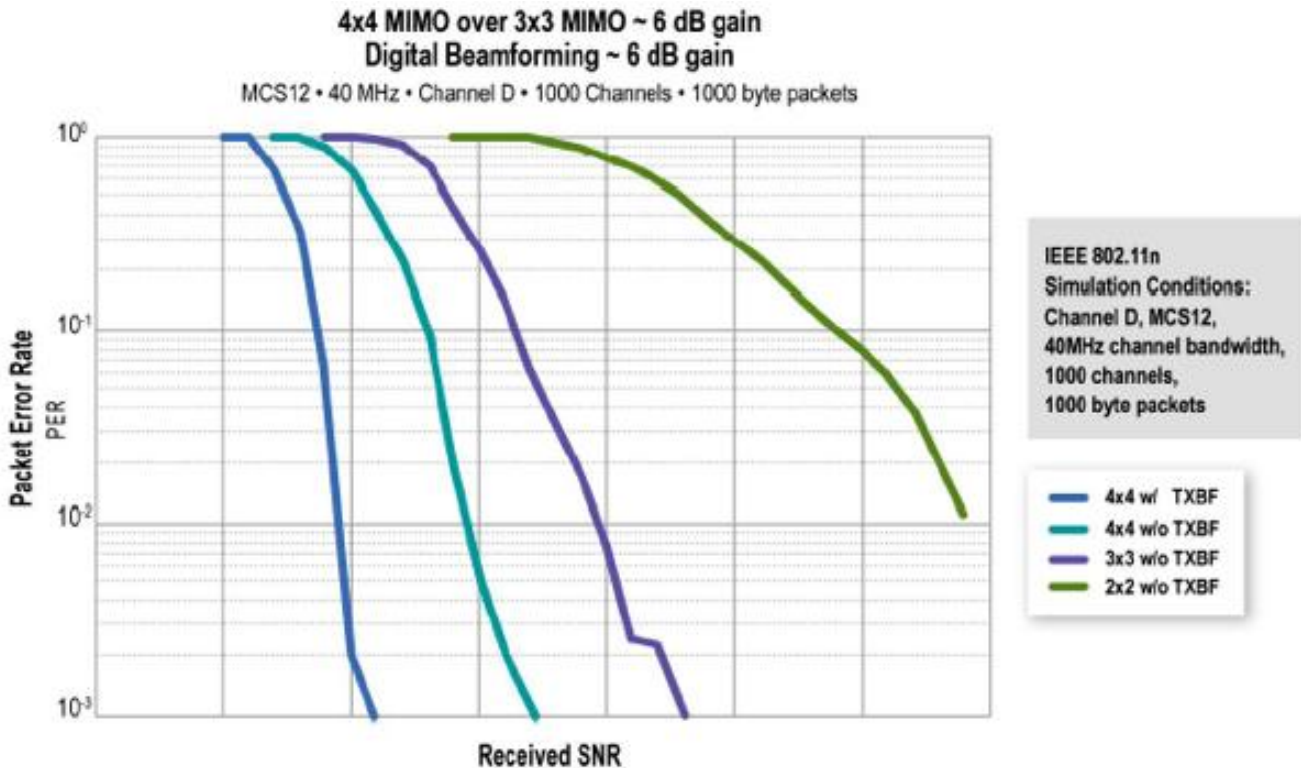

• *nxn MIMO Packet Error rate for various IEEE 802.11n systems. 4x4 MIMO with Adaptive Beamforming has 12 dB advantage over 3x3 MIMO without Beamforming.*



4X4 Systems.

- Integrate the latest 4x4 802.11n beam forming technology with IP layer QoS
- Enable robust indoor mesh networking for HD video distribution
- IP multicast flow router



Dead Zones and Poor Coverage in Wi-Fi Home Networks

Automated Meter Infrastructure Requirements

- Low capital and operational cost
- Easy installation, with minimal custom engineering
- High reliability & security
- Flexibility over distance (20m – 1+km between buildings)
- Low bandwidth requirements (kbps)



Wireless Mesh in the AMI Network

- Several AMI vendors incorporate wireless:
 - Wi-Fi (inexpensive, unlicensed, short-range)
 - WiMAX (licensed, longer-range)
 - Cellular data (carrier subscription service, near-ubiquitous)
- Wi-Fi is very low-cost equipment (volume silicon) and has no licensing or subscription costs
- Wi-Fi can be built as a self-organizing mesh, incorporating pt-pt links and omni antennas



Mesh Networking in NAN



- Dynamic recognition of peers
- Packet and flow classification
- IPV4 and IPV6 flow routers

Transmission & Distribution: Monitoring and Control

- Current SCADA networks do not sense/control with the required speed, or reach to the edges of the distribution network
- A new communications infrastructure is required, with orders of magnitude more bandwidth and endpoints.
- The sensing/control network for transmission & distribution must be extremely robust and secure



Wi-Fi in the Distribution Network

- Wireless rather than wired communications is ideal around high-voltage power lines as it is electrically isolated
- Wi-Fi equipment is low-power and can be solar/battery powered, providing resilience during grid disruptions
- Self-organizing mesh networks incorporate short- and long-distance links and advanced security protocols
- Applications such as surveillance cameras are already integrated into Wi-Fi mesh networks



Applications for the Smart Grid



- PTZ Camera attached to 802.11n edge Mesh node
- 8db antenna provides wireless connectivity at 700 feet from mesh node
- Ideal for disaster recovery networks, rapid deployment




Applications for the Smart Grid



- 80W solar panel
- 10A charge controller
- Total power requirement for the mesh node is 20W

Applications for the Smart Grid: City Wide Video Surveillance

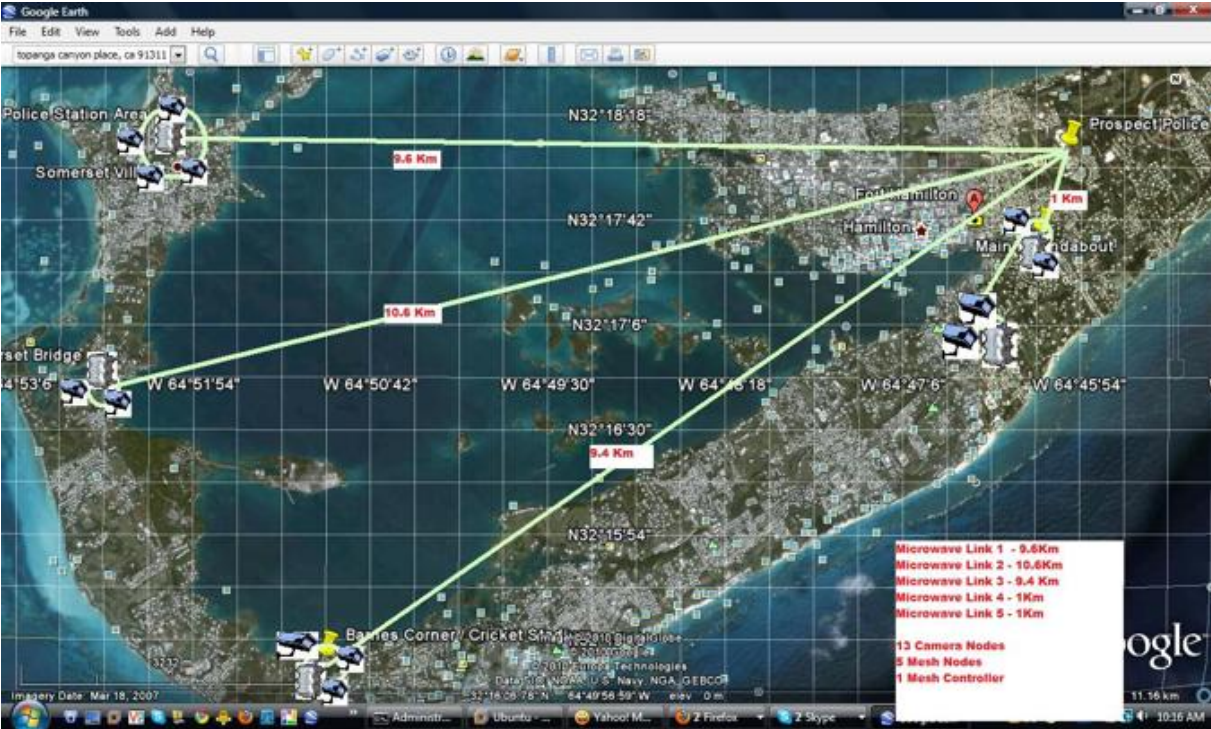

Hamilton, Bermuda

- 5 Mesh Networks
- Interconnected over Microwave
- 10km longest path
- Police video surveillance
- 802.11n Mesh nodes for camera traffic



Applications for the Smart Grid: Remote Mining Sites



El Brocal, Peru

- Open Mine
- Altitude 5000m
- Mining Pit
 - 3 km wide
 - 0.5 km deep
- Satellite BH
- Mobile Mesh on CAT Trucks
- 802.11n Mesh nodes for Comm.



Conclusions:

- The smart grid is built on communications networks
- Several protocols and standards will be used
- Wi-Fi is well-established, with known cost, power, bandwidth and range envelopes
- Self-organizing Wi-Fi mesh networks will be a part of the Home Area Network, Advanced Metering Infrastructure and Transmission/Distribution monitoring and control networks
- TV White space availability on the horizon is promising

